

**STANDARD INSTRUMENT DEPARTURES (SID)  
WEST SALE TWO DEPARTURE - RWYS 09 & 27  
WEST SALE, VIC (YWSL)**


**16 JUN 2022**

AFIS* 118.3	ATIS (ESL)* 125.4 350	APP (ESL)* 123.3 340.2	ACD (ESL)* 133.6	ACC (ESL)* 135.8	FIA ML CEN 124.0	CTAF+AFRU* 118.3	PAL+AA 119.6	Bearings are Magnetic Elevations in FEET AMSL
----------------	--------------------------	---------------------------	---------------------	---------------------	---------------------	---------------------	-----------------	--


**\* REFER TO ERSA FOR AVAILABILITY**



NOT TO SCALE

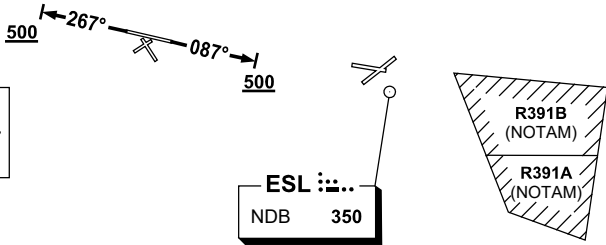

**# CAUTION:**  
1. TREES IN RWY 27  
DEP AREA.



15 NM MSA 3100

GRAD 3.3%

**WEST SALE TWO DEPARTURE**

**RWY 09**

- GRAD 3.3%.
- Track 087°
- At 500FT turn to assigned heading
- Contact EAST SALE APPROACH on 123.3 for radar vectors

**RWY 27**

- GRAD 3.3%.
- Track 267°
- At 500FT turn to assigned heading
- Contact EAST SALE APPROACH on 123.3 for radar vectors

**COMMUNICATION FAILURE PROCEDURE**

On recognition of communication failure

- Squawk 7600
- Maintain last assigned vector for two minutes and, if necessary, climb to minimum safe altitude to maintain terrain clearance, then
- Proceed in accordance with the latest ATC route clearance acknowledge

Changes: PAL+AA.

WSLDP01-171