

**MARBLE BAR****AVFAX CODE 6841**

WA

210945S

1195023E

AD OPR Shire of East Pilbara, PMB 22, Newman, WA, 6753. Email:

marblebarops@eastpilbara.wa.gov.au: AD Manager snair@eastpilbara.wa.gov.au. Mobile 0455 554 520. Website: www.eastpilbara.wa.gov.au.

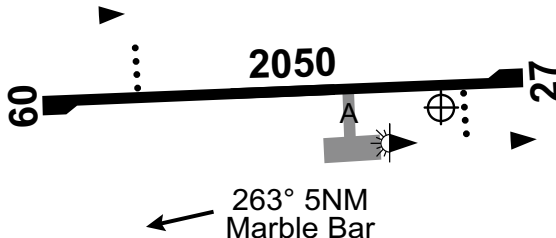
UTC +8

VAR 1 DEG E

**ELEV 637****FULL NOTAM SERVICE NOT AVBL**

YMBL

CERT

**REMARKS**

1. PPR. HJ only. CTC AD Manager.
2. CTC AD manager:
  - a. AD charges apply.
  - b. ACFT parking availability (limited) and allocation.

**PASSENGER FACILITIES**

PT/AC/LG/WC.

**PHYSICAL CHARACTERISTICS**

09/27 083 67a PCN 27 /F /B /48000/1080 (157PSI) /T WID 30 RWS 90

Additional TKOF length AVBL for RWY 09. Refer to *RDS* for further information.**AERODROME AND APPROACH LIGHTING**

RWY 09/27 PAPI(1) AFRU+PAL 126.7 3.0 DEG51FT

RWY 09/27 PTBL(2)

BY PRIOR  
ARRANGEMENT

- (1) Left side.
- (2) EMERG only. 90MIN PN.
  1. RWY 09 THR starter extension not AVBL when PTBL LGT ACT.
  2. No PERM LGT AVBL.

**OTHER LIGHTING**

PTBL TWY LGT: Blue edge. EMERG only with 90MIN PN.

**ATS AND AERODROME COMMUNICATION FACILITIES**

FIA MELBOURNE CENTRE 118.6 5500FT

**LOCAL TRAFFIC REGULATIONS**

1. RWS not MNTN for ACFT OPS.
2. Departing aircraft above 5,700KG MTOW are required to taxi on RCL to the THR of the RWY in use and turn at the turn pads.
3. All turns on the RWY and turn pads are to be at MNM speed and MAX radius.
4. Arriving ACFT above 5,700KG MTOW are to extend the landing roll to the end of the RWY in use and use turn pads for turning.
5. All ACFT are RQ to apply MNM power on all engines when DEP from all parking bays on the apron.

**CTAF - AFRU 126.7****CHARTS RELATED TO THE AERODROME**

WAC 3229.