

FOR CASA APPROVED STANDARD INSTRUMENT DEPARTURE (SID) OPERATORS ONLY

RW14 RNAV (RNP 0.3) CUDGN FOUR

GOLD COAST, QLD (YBCG)


2 DEC 2021

USE QNH

ATIS 112.3 134.5 (H24) (TWR HR)	APP BN 123.5	TWR 118.7	SMC 121.8	ACD 128.75	FIA (AH) BN CEN 119.5	AWIS (AH) 134.5	CTAF+AFRU (AH) AFRU+PAL (AH) 118.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------------------------	-----------------	--------------	--------------	---------------	--------------------------	--------------------	--	--

GE PROPRIETARY AND CONFIDENTIAL

202106091719 COPYRIGHT 2021 NAVERUS, INC. USA

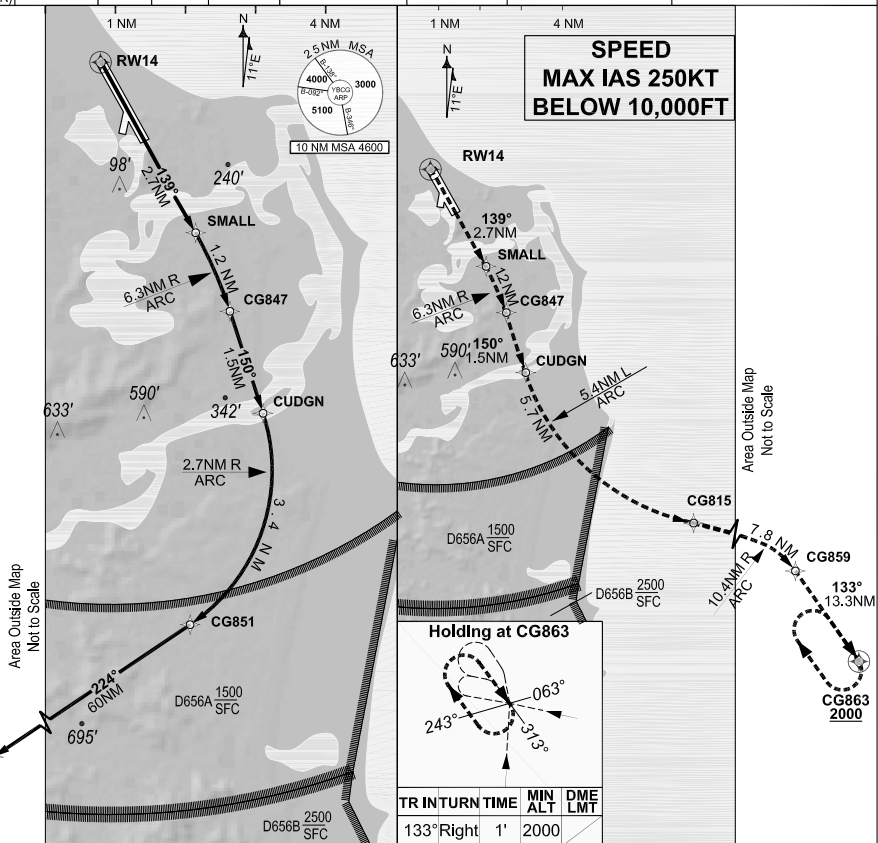

RW 14 CUDGN DEPARTURE

RF Required

RWY 14

- Track 139° to SMALL.
- Turn RIGHT via the RNAV (RNP) track to CG847.
- Track 150° to CUDGN.
- Turn RIGHT via the RNAV (RNP) track to CG851.
- Track 224° to APAGI, thence as cleared.

RNAV (RNP 0.3) ENGINE OUT DEPARTURE

RWY 14

ENGINE FAILURE PRIOR TO CUDGN

- Climb to 2000FT.
- Fly the RNAV (RNP) ENGINE OUT DEPARTURE track to CG863.
- Hold at CG863.
- MAX holding IAS 230KT.

ENGINE FAILURE AFTER CUDGN

- Continue via the RNAV (RNP) departure track to APAGI.

Changes: From SUP H55/21.

BCGDP04-169

DO NOT USE FOR NAVIGATION

Prepared by GE Aviation

© Airservices Australia

