


**STANDARD INSTRUMENT DEPARTURES (SID)
 AVALON FIVE DEPARTURE (RADAR)
 AVALON, VIC (YMAV)**

24 MAR 2022


ATIS 118.2 116.1	AWIS (AH) 116.1	AV APP 133.55	TWR 120.1	FIA (AH) ML CEN 135.7	CTAF+AFRU (AH) 120.1	AFRU+PAL (AH) 120.1	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------------	------------------	--------------	--------------------------	-------------------------	------------------------	--

NOT TO SCALE

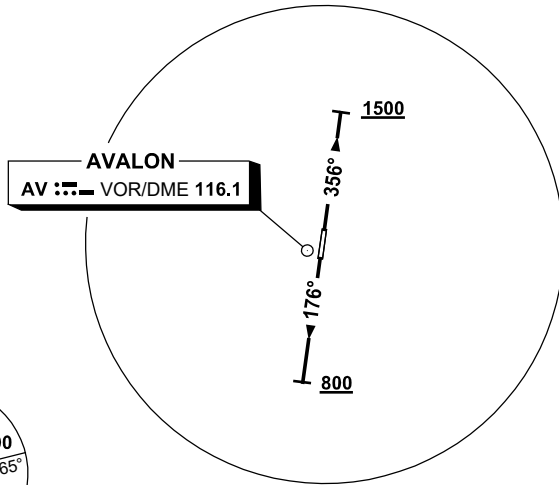

**SPEED
 MAX IAS 250KT
 BELOW 10,000ft**

**CLASS D SPEED
 LIMITS APPLY**



10 NM MSA 2500

GRAD 3.3%

AVALON FIVE DEPARTURE (RADAR)

RWY 18

- Track 176°
- At or ABV 800ft turn to assigned heading or track
- Contact AV Approach for Radar Vector

RWY 36

- Track 356°
- At or ABV 1500ft turn to assigned heading or track
- Contact AV Approach for Radar Vector

COMMUNICATIONS FAILURE PROCEDURE

On recognition of communication failure

- Squawk 7600
- Maintain last assigned vector for two minutes, and
- CLIMB IF NECESSARY TO MINIMUM SAFE ALTITUDE, to maintain terrain clearance, then
- proceed in accordance with the latest ATC route clearance acknowledged.