USE QNH

NDB RWY 22

13 JUN 2024

MUDGEE, NSW (YMDG)

FIA	CTAF	PAL			Bearings are Magnetic Elevations in FEET AMSL
BN CEN 133.05	**126.7**	**122.3**			

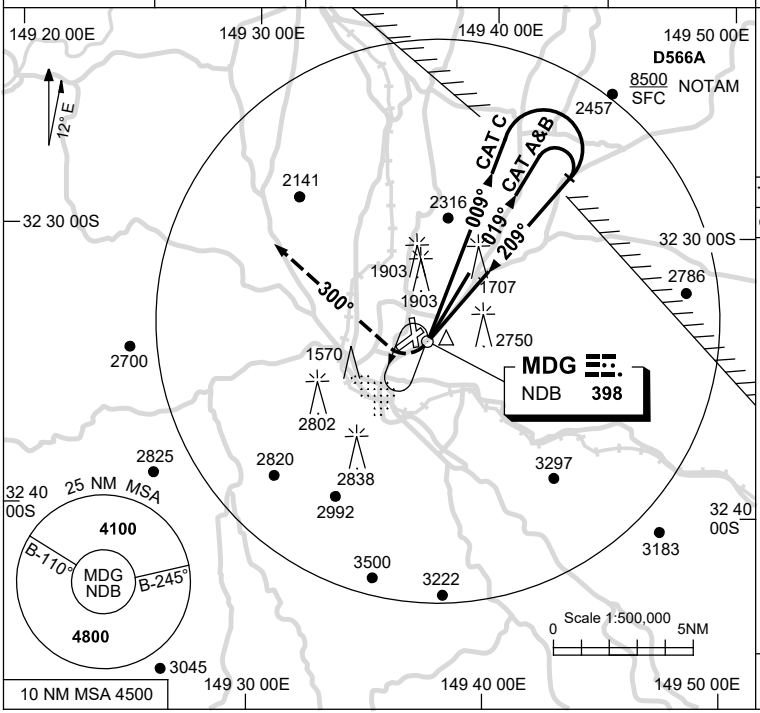

Holding at MDG NDB



TR IN	TURN	TIME	MIN ALT	DME LMT
009°	Left	1	4500	



AD ELEV 1545

DME DIST				NOT APPLICABLE							
ALT											

MISSED APPROACH:
TURN RIGHT,
TRACK 300°.
CLIMB TO 4100ft.

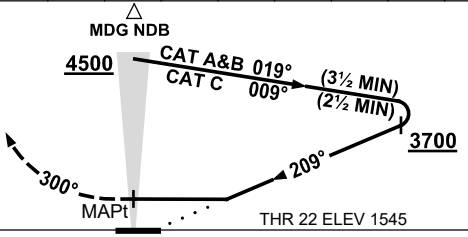

NOTES

1. MAX IAS:
   INITIAL :
   CAT A&B 140KT.
   CAT C 210KT.
2. * NO CIRCLING IN SECTOR S OF RWY 04/22 AND E OF RWY 16/34.
3. AWIS (PHONE) 02 9353 6439

CATEGORY	A	B	C	D
S-I NDB	**3110** (1565-5.0)			NOT APPLICABLE
CIRCLING *	**3110** (1565-2.4)		**3520** (1975-4.0)	
ALTERNATE	(2065-4.4)		(2475-6.0)	

Changes: CIRCLING MINIMA, ALTERNATE MINIMA.

MDGNB01-179

© Airservices Australia

airservices australia