ATIS	AWIS (AH)	TWR	LT APP/FIA (AH)	CTAF+AFRU (AH)	AFRU+PAL (AH)	Bearings are Magnetic Elevations in FEET AMSL
112.6 (TWR HR) **134.75** (H24)	**112.6**	**118.7**	**ML CEN 123.8**	**118.7**	**118.7**	



10 NM MSA 5800

DME USING LT DME
REFERENCE WAYPOINT LT VOR



AD ELEV 562

SECTOR D

LT VOR or NDB



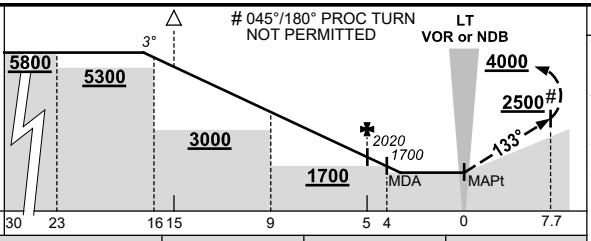

MISSED APPROACH:
TRACK 133° OUTBOUND FROM LT NDB OR LT VOR, CLIMB TO 3000FT. AT 7.7 LT AND AFTER PASSING 2500FT TURN RIGHT FOR 080°/260° PROC TURN. THENCE TRACK 313° FOR RWY 32L ILS, OR TRACK 313° TO LT VOR, CONTINUE CLIMB TO 4000FT.

NOTES:
1. MAX IAS:
MAPt TURN: 190KT.
PROC TURN: 210KT.

CIRCLING MINIMA	**A,B: 1440-2.4**	**C: 1670-4.0**	**D: 1670-5.0**

NM TO LT VOR	16.9	16	15	14	13	12	11	10	9	8	7	6	5	4	3.2
ALT (3° APCH PATH)	5800	5520	5200	4880	4570	4250	3930	3610	3290	2970	2660	2340	2020	1700	1440

MOTRA TO LT

LT VOR or NDB 6600 242°

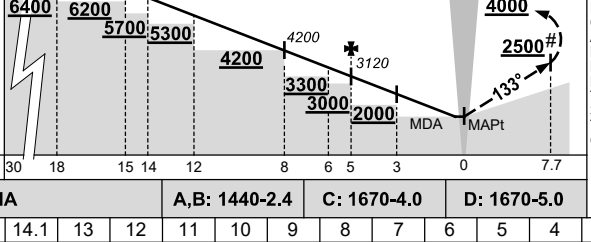

MISSED APPROACH:
TRACK 133° OUTBOUND FROM LT NDB OR LT VOR, CLIMB TO 3000FT. AT 7.7 LT AND AFTER PASSING 2500FT TURN RIGHT FOR 080°/260° PROC TURN. THENCE TRACK 313° FOR RWY 32L ILS, OR TRACK 313° TO LT VOR, CONTINUE CLIMB TO 4000FT.

NOTES:
1. MAX IAS:
MAPt TURN: 190KT.
PROC TURN: 210KT.

CIRCLING MINIMA	**A,B: 1440-2.4**	**C: 1670-4.0**	**D: 1670-5.0**

NM TO LT VOR	14.1	13	12	11	10	9	8	7	6	5	4	3	2	1	0.4
ALT (3.4° APCH PATH)	6400	6000	5640	5280	4920	4560	4200	3840	3480	3120	2760	2400	2030	1670	1440

© Airservices Australia

airservices