

GLS RWY 16
MELBOURNE, VIC (YMML)

ATIS
114.1 118.0

APP
132.0

TWR
120.5

SMC
121.7

**Bearings are Magnetic
Elevations in FEET AMSL**

Holding at BELTA

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
BELTA	185	-160	
5	160	-150	

G16A
GLS 21940

Scale 1:500,000

0 5NM

10 NM MSA 3300

4500

3700

B-080° YMMML B-260°

ARP

160°


5.5 NM

12°E

050° 230° 340°

AD ELEV 434

NM TO RW16	7.9	7	6	5	4	3	2	1	0.5				
ALT (3° APCH PATH)	3000	2710	2390	2070	1760	1440	1120	800	640				

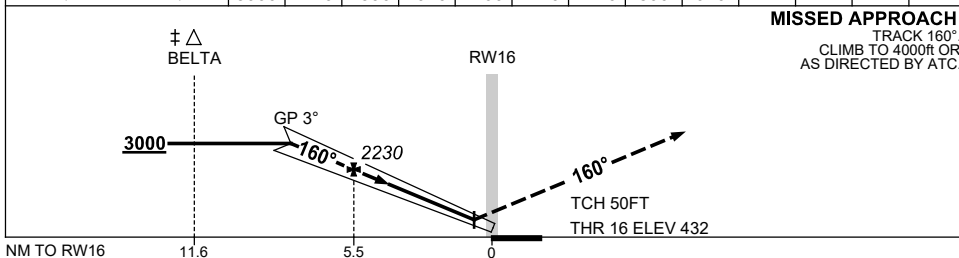

CATEGORY	A	B	C	D/D _L
S-I GLS	640 (208) 0.8 550 RVR			
CIRCLING	1140 (706-2.4)		1450 (1016-4.0)	1600 (1166-5.0)
ALTERNATE	(1206-4.4)		(1516-6.0)	(1666-7.0)

1. MAX IAS :
BELTA : 185KT.
2. ACFT MAY BE
RADAR VECTORED
TO FNA OR JOIN
PROCEDURE OFF
STAR PRIOR TO
FAF.

MMLGL05-182