

ATIS 114.1 118.0 **APP** 132.0 **TWR** 120.5 **SMC** 121.7

MAX IAS 185KT

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
BELTA	185	-160	
5	160	-150	

IMS ILS/DME 109.7


Holding at BELTA

TR IN	TURN	TIME	MIN ALT	DME LMT
160°	Left	1	4000	17

AD ELEV 434

Bearings are Magnetic
Elevations in FEET AMSL

NM TO IMS DME	8.1	7.7	7	5.7	5	4	3	2	1				
ALT (3° APCH PATH)	3000	2880	2650	2240	2010	1690	1370	1050	740				

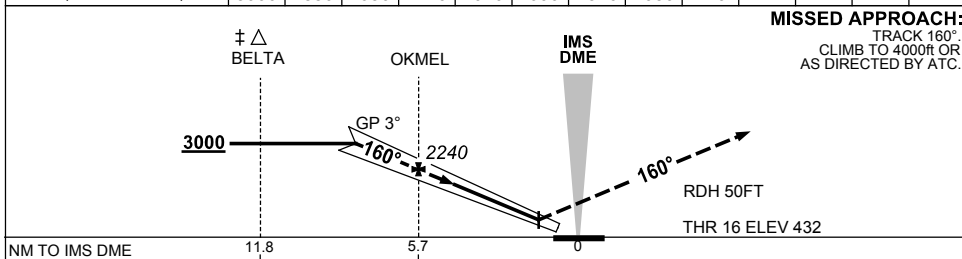

NM TO THR 16 11.6 5.5 **NOTES**

CATEGORY	A	B	C	D/DL
S-I ILS CAT IIIb	75 RVR			
S-I ILS CAT II	RA93 DA 532 (100) 300 RVR			
ALTERNATE**	(1206-4.4)	(1516-6.0)	(1666-7.0)	

1. MAX IAS :
BELTA : 185KT.
2. SPECIAL AIRCREW &
ACFT CERTIFICATION
REQUIRED.
- * 3. SPECIAL ALT MNM
700/2.5KM.
- ‡ 4. ACFT MAY BE RADAR
VECTORED TO JOIN
PROCEDURE FM
STAR PRIOR TO FAP.

MMLII04-182