

VOR RWY 34
MELBOURNE, VIC (YMML)

ATIS
114.1 118.0

APP
132.0

TWR
120.5

SMC
121.7

NAVAID RQ:
• DME

Holding as advised by ATC


TR	TURN	TIME	MIN ALT	DME LMT

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
TONAR	185 - 160		
5	160 - 150		

AD ELEV 434
Bearings are Magnetic
Elevations in FEET AMSL

DIST TO ML DME	9.7	9	8	7	6.5	6	5	4	3	2.7			
ALT (3° APCH PATH)	2990	2770	2450	2130	1970	1810	1490	1180	860	760			

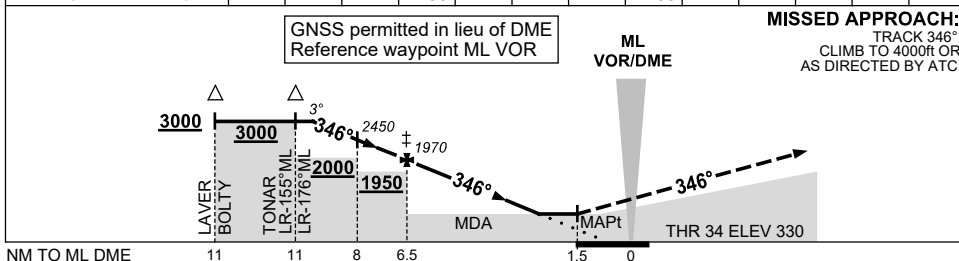

CATEGORY	A	B	C	D
S-I VOR/DME	760 (430-2.4)			
CIRCLING	1140 (706-2.4)	1450(1016-4.0)		1600(1166-5.0)
ALTERNATE *	(1206-4.4)	(1516-6.0)		(1666-7.0)

1. MAX IAS :
TONAR : 185KT.
- * 2. SPECIAL ALT MNM
700/2.5KM.
- ‡ 3. ACFT MAY BE
RADAR VECTORED
TO IAF.

MMLVO03-178