USE QNH

LOC-T RWY 29

20 MAR 2025

DARWIN, NT (YPDN)

ATIS	APP-E	SMC	TWR	DEP
128.25 308 316.2	APP-W 134.1	121.8	133.1	123.0

NAVAID RQ:
- **DME IDN**

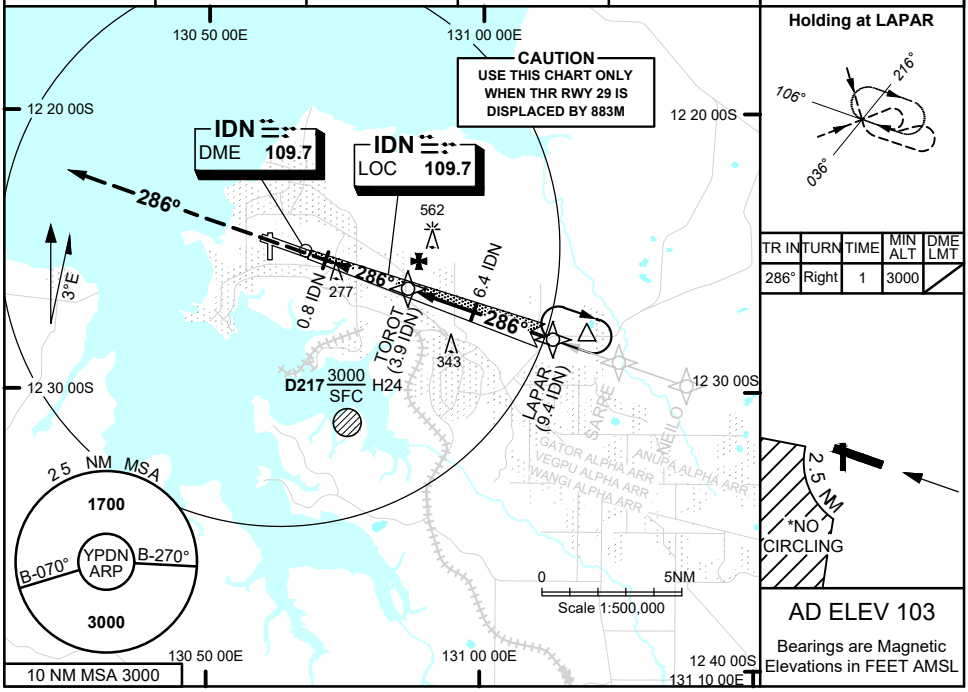

Holding at LAPAR

TR IN	TURN	TIME	MIN ALT	DME LMT
286°	Right	1	3000	

AD ELEV 103

Bearings are Magnetic
Elevations in FEET AMSL

NM TO IDN DME	1.2	2	3	3.9	5	6	6.4	7	8	8.7			
ALT (3° APCH PATH)	620	880	1200	1480	1830	2150	2280	2470	2790	3000			

MISSED APPROACH:
TRACK 286°,
CLIMB TO 3000FT OR
AS DIRECTED BY ATC.

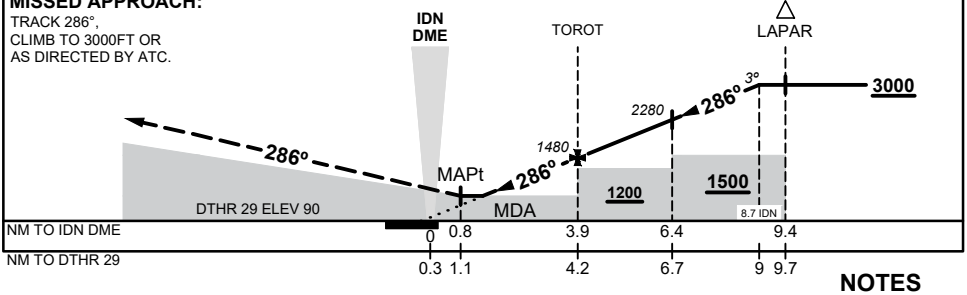

NOTES

1. ACFT MAY BE RADAR VECTORED TO FNA
2. *NO CIRCLING IN SECTOR SW OF RWY 11/29 AND RWY 18/36 BEYOND 2.5 NM
3. #SPECIAL ALTN MNM 800/4 KM

CATEGORY	A	B	C	D
S-I LOC	**620** (530 - 3.0)			
CIRCLING*	**800** (697 - 2.4)		**900** (797 - 4.0)	**1100** (997 - 5.0)
ALTERNATE#	(1197 - 4.4)		(1297 - 6.0)	(1497 - 7.0)

Changes: DISP THR DIST, DIST/ALT TABLE, CONNECTION TO STARS, LOGO, Editorial

PDNII04-182

© Airservices Australia

GLOBAL AIRSPACE SOLUTIONS PTY LTD