


STANDARD INSTRUMENT ARRIVAL (STAR)
VEGPU ONE ALPHA ARRIVAL (RNAV)
DARWIN, NT (YPDN)

20 MAR 2025

ATIS 128.25 308 316.2	APP-E 125.2 APP-W 134.1	TWR 133.1	SMC 121.8		Bearings are Magnetic Elevations in FEET AMSL
-----------------------------	----------------------------	--------------	--------------	--	--

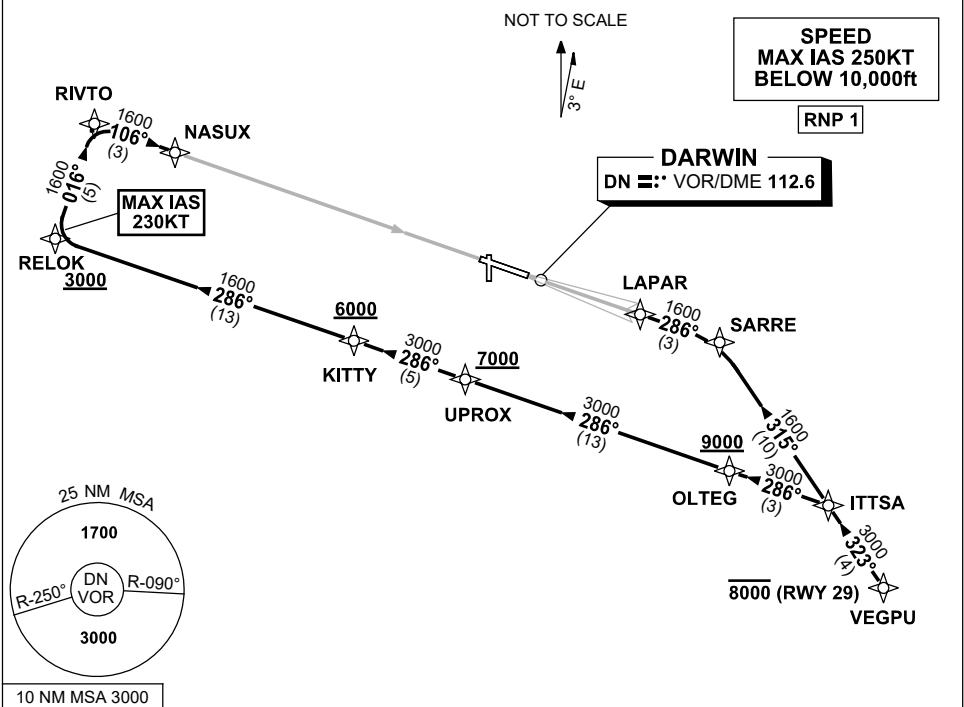

ARRIVAL: VEGPU ONE ALPHA

RWY 11:

- From VEGPU track 323° to ITTSA
- Turn LEFT, track 286° to OLTEG
Cross OLTEG AT or ABV 9000ft
- Track 286° to UPROX
Cross UPROX AT or ABV 7000ft
- Track 286° to KITTY
Cross KITTY AT or ABV 6000ft
- Track 286° to RELOK
Cross RELOK AT or ABV 3000ft
MAX IAS 230KT from RELOK
- Turn RIGHT track 016° to RIVTO
- Turn RIGHT track 106° to NASUX for VOR or NDB RWY 11 approach

RWY 29:

- **Cross** VEGPU AT or BLW 8000ft
- From VEGPU, track 323° to ITTSA
- Turn LEFT, track 315° to SARRE
- Turn LEFT, track 286° to LAPAR for ILS or LOC RWY 29 approach

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: RELOK ALT RQMNTS, RIVTO-NASUX AND ITTSA-SARRE COURSES.

PDNSR06-182