
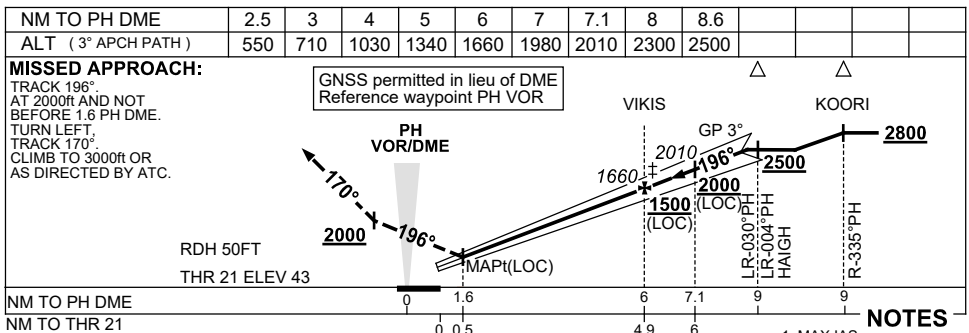


USE QNH

ILS-Y or LOC-Y RWY 21

20 MAR 2025

PERTH, WA (YPPH)

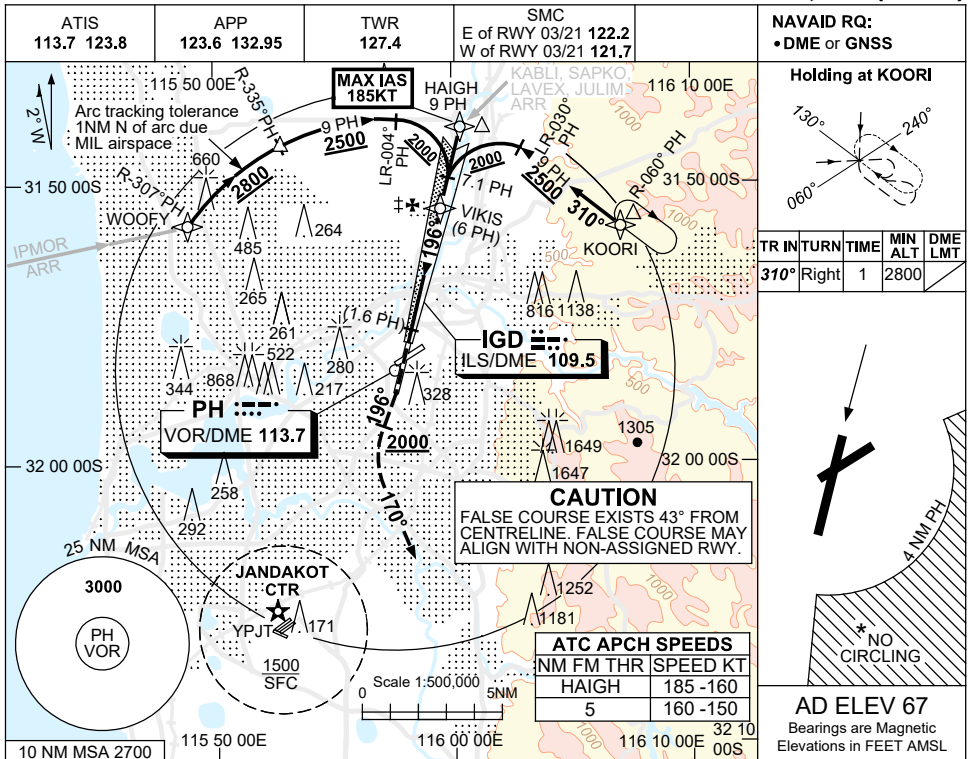

CATEGORY	A	B	C	D/DL
S-I ILS		250 (207) 0.8	550 RVR	
S-I LOC		550 (507-2.0)		
CIRCLING *	760 (693-2.4)	1440 (1373-4.0)	1440 (1373-5.0)	
ALTERNATE *	(1193-4.4)	(1873-6.0)	(1873-7.0)	

- MAX IAS:
HAIGH : 185KT.
- NO CIRCLING CAT C&D
ACFT BEYOND 4 DME
PH E OF RWY 03 / 21
AND 06 / 24.
- ACFT MAY BE RADAR
VECTORED TO FNA.
- SPECIAL ALTN MNM
700/2.5KM.
- COLOUR: SEE
SPEC NOTICES.

Changes: WOOFY RADIAL CORRECTION, CAT DL.

PPII01-182