ATIS	AWIS (AH)	APP	TWR	SMC/ACD	FIA (AH)	CTAF+AFRU (AH) AFRU+PAL (AH)	Bearings are Magnetic Elevations in FEET AMSL
116.7 127.45 263	116.7	124.5	118.7	121.7	ML CEN 125.9	118.7	



10 NM MSA 5100

DME USING CB DME
REFERENCE WAYPOINT CB VOR

CB VOR/DME 116.7

CB NDB 263

* NO CIRCLING BEYOND 4NM WEST OF RWY 17/35.



AD ELEV 1886

SECTOR A



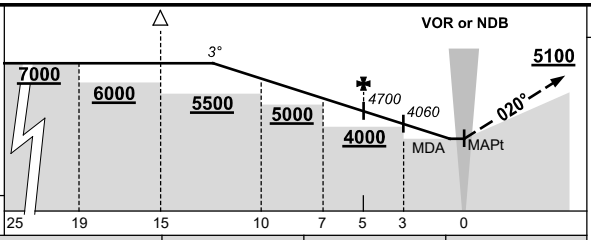

MISSED APPROACH:

TURN RIGHT, TRACK 020°, CLIMB TO 5100FT; OR AS DIRECTED BY ATC.

REQUIREMENT:
COMPLETE TURN WITHIN 4 DME CB.

CIRCLING MINIMA	A,B: 3350-2.4	C: 3580-4.0	D: 3720-5.0

NM TO CB VOR/DME	12.2	12	10	9	8	7	6	5	4	3	2	1.9	1.5	1	0.8
ALT (3° APCH PATH)	7000	6930	6290	5970	5650	5340	5020	4700	4380	4060	3750	3720	3580	3430	3350

SECTOR C



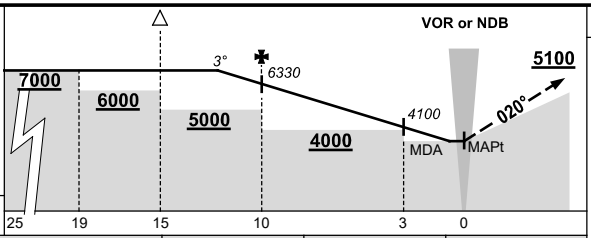

MISSED APPROACH:

TURN LEFT, TRACK 020°, CLIMB TO 5100FT; OR AS DIRECTED BY ATC.

CIRCLING MINIMA	A,B: 3350-2.4	C: 3580-4.0	D: 3720-5.0

NM TO CB VOR/DME	12.1	12	11	10	9	8	7	6	5	4	3	2	1.8	1.4	0.7
ALT (3° APCH PATH)	7000	6970	6650	6330	6010	5690	5370	5050	4740	4420	4100	3780	3720	3580	3350

© Airservices Australia

airservices