

ILS-Y or LOC-Y RWY 35
CANBERRA, ACT (YSCB)

ATIS 116.7 127.45 263
AWIS (AH) 116.7
APP 124.5
TWR 118.7
SMC/ACD 121.7
FIA (AH) ML CEN 125.9
CTAF+AFRU (AH) AFRU+PAL (AH) 118.7

CB **VOR/DME 116.7**
ICB **ILS/DME 109.5**

R-049° CB
R-13° CB
R-139° CB
R-305° CB
R-255° CB
R-070° CB

2500
3500
4500
5000
5100
5900
7500

348° Right 1 1/2 5600
348° Right 1 1/2 6000


NO CIRCLING

AD ELEV 1887
 Bearings are Magnetic
 Elevations in FEET AMSL

NM TO CB DME	4.5	5	5.8	6.8	7	7.9	9	10	10.9	11	12	12.9	
ALT (3° APCH PATH)	2700	2870	3140	3460	3510	3810	4150	4470	4760	4790	5110	5400	

TRACK 348°. CLIMB TO 5100ft OR AS DIRECTED BY ATC.

GNSS permitted in lieu of DME
Reference waypoint CB VOR

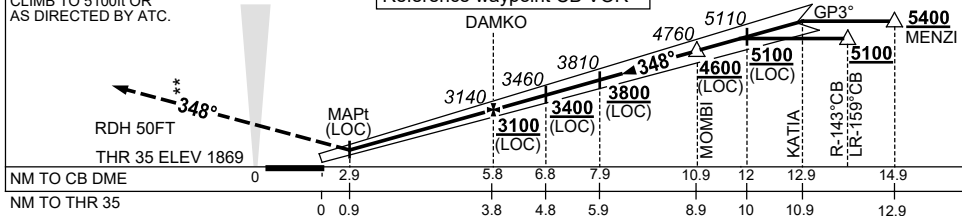

NOTES

- #1. MAX IAS:
HLDG AT MOMB
5600ft : 170KT.
6000ft : 210KT.
- * 2. NO CIRCLING
BEYOND 4NM WEST
OF RWY 17 / 35.
- * 3. MIN MISSED APCH
GRAD TO 3200ft,
THEN 2.5%.
- 4. **COLOUR:** SEE
SPEC NOTICES.

CATEGORY	A	B	C	D
S-I ILS CAT I (4.4% MAP)*	2170 (301) 0.8	750 RVR (VIS 0.8	550 RVR WITH ACTUAL QNH)	
S-I ILS CAT I (2.5% MAP)	2420 (551) 2.2	(VIS 1.6 WITH ACTUAL QNH)		
S-I LOC	2700 (831-3.9)			
CIRCLING *	3350 (1463-2.4)	3580 (1693-4.0)	3720 (1833-5.0)	
ALTERNATE	(1963-4.4)	(2193-6.0)	(2333-7.0)	

SCBII02-180