AWIS	ATIS	TWR	SMC	CTAF+AFRU (AH)	FIA (AH)	AFRU+PAL (AH)	Bearings are Magnetic Elevations in FEET AMSL
134.525	115.6 133.85	123.25	121.8	123.25	ML CEN 125.2	123.25	



10 NM MSA 4200

DME USING AY DME
REFERENCE WAYPOINT AY VOR

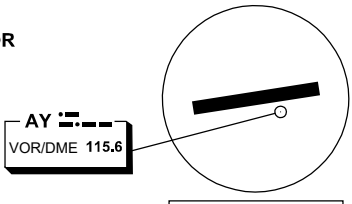

AD ELEV 539

SECTOR A



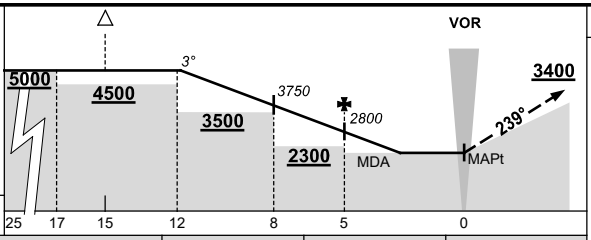

MISSED APPROACH:
TURN RIGHT, TRACK 239°. CLIMB TO 3400FT.

NOTE: PROC NOT AVBL WHEN **R368** ACT UNLESS ADVISED BY ATC.

CIRCLING MINIMA	A,B: 2080-2.4	C: 2220-4.0	D: 2270-5.0

NM TO AY VOR/DME	11.9	11	10	9	8	7	6	5	4	3.3	3.2	2.8		
ALT (3° APCH PATH)	5000	4710	4390	4070	3750	3430	3110	2800	2480	2270	2220	2080		

SECTOR B



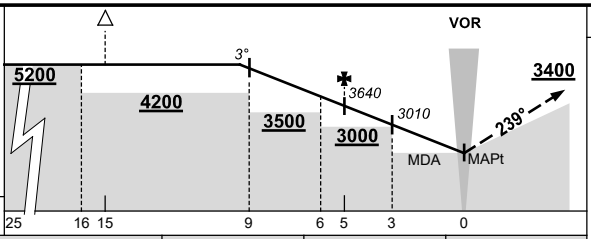

MISSED APPROACH:
TURN AS APPROPRIATE, TRACK 239°. CLIMB TO 3400FT.

NOTE: PROC NOT AVBL WHEN **R368** ACT UNLESS ADVISED BY ATC.

CIRCLING MINIMA	A,B: 2050-2.4	C: 2220-4.0	D: 2270-5.0

NM TO AY VOR/DME	9.3	9	8	7	6	5	4	3	2	1	0.7	0.5	0	
ALT (3° APCH PATH)	5000	4920	4600	4280	3960	3640	3320	3010	2690	2370	2270	2220	2050	

SECTOR C



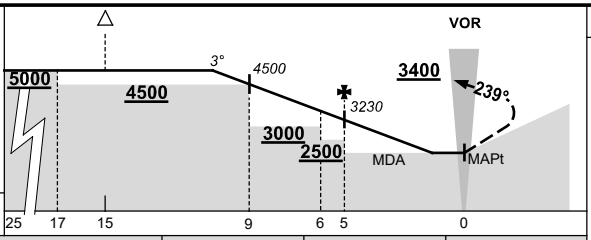

MISSED APPROACH:
TURN LEFT, TRACK 239°. CLIMB TO 3400FT.

NOTE: PROC NOT AVBL WHEN **R368** ACT UNLESS ADVISED BY ATC.

CIRCLING MINIMA	A,B: 2050-2.4	C: 2220-4.0	D: 2270-5.0

NM TO AY VOR/DME	10.6	10	9	8	7	6	5	4	3	2	1.8	1.3		
ALT (3° APCH PATH)	5000	4820	4500	4190	3870	3550	3230	2910	2590	2270	2220	2050		

Changes: SEC-A CAT AB MINIMA, CIRCLING CAT C MINIMA, DIST-ALT TABLE, NEW LOGO. MAYDG01-177

© Airservices Australia

airservices australia