ATIS	AWIS (AH)	APP	TWR	SMC/ACD	FIA (AH)	CTAF+AFRU (AH) AFRU+PAL (AH)	Bearings are Magnetic Elevations in FEET AMSL
116.7 127.45 263	**116.7**	**124.5**	**118.7**	**121.7**	**ML CEN 125.9**	**118.7**	



10 NM MSA 5100

DME USING CB DME
REFERENCE WAYPOINT CB VOR

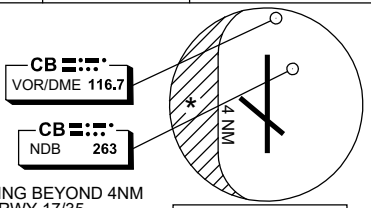

* NO CIRCLING BEYOND 4NM WEST OF RWY 17/35.

AD ELEV 1887

SECTOR A



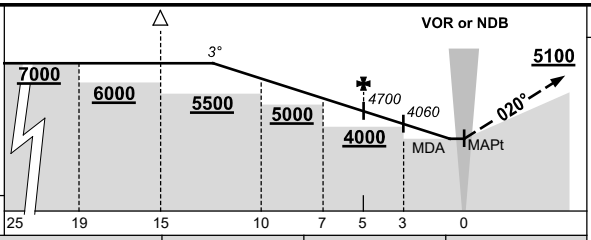

MISSED APPROACH:
TURN RIGHT, TRACK 020°, CLIMB TO 5100ft; OR AS DIRECTED BY ATC.

REQUIREMENT:
COMPLETE TURN WITHIN 4 DME CB.

CIRCLING MINIMA			**A,B: 3350-2.4**			**C: 3580-4.0**			**D: 3720-5.0**						
NM TO CB VOR/DME	12.2	12	10	9	8	7	6	5	4	3	2	1.9	1.5	1	0.8
ALT (3° APCH PATH)	7000	6930	6290	5970	5650	5340	5020	4700	4380	4060	3750	3720	3580	3430	3350

SECTOR C



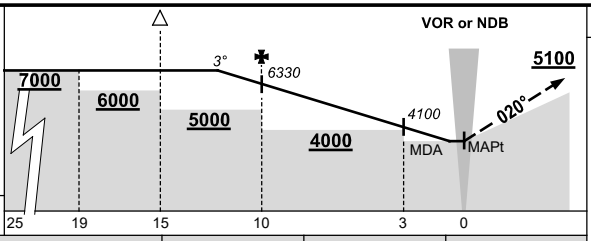

MISSED APPROACH:
TURN LEFT, TRACK 020°, CLIMB TO 5100ft; OR AS DIRECTED BY ATC.

CIRCLING MINIMA			**A,B: 3350-2.4**			**C: 3580-4.0**			**D: 3720-5.0**						
NM TO CB VOR/DME	12.1	12	11	10	9	8	7	6	5	4	3	2	1.8	1.4	0.7
ALT (3° APCH PATH)	7000	6970	6650	6330	6010	5690	5370	5050	4740	4420	4100	3780	3720	3580	3350

© Airservices Australia