




5 SEP 2024

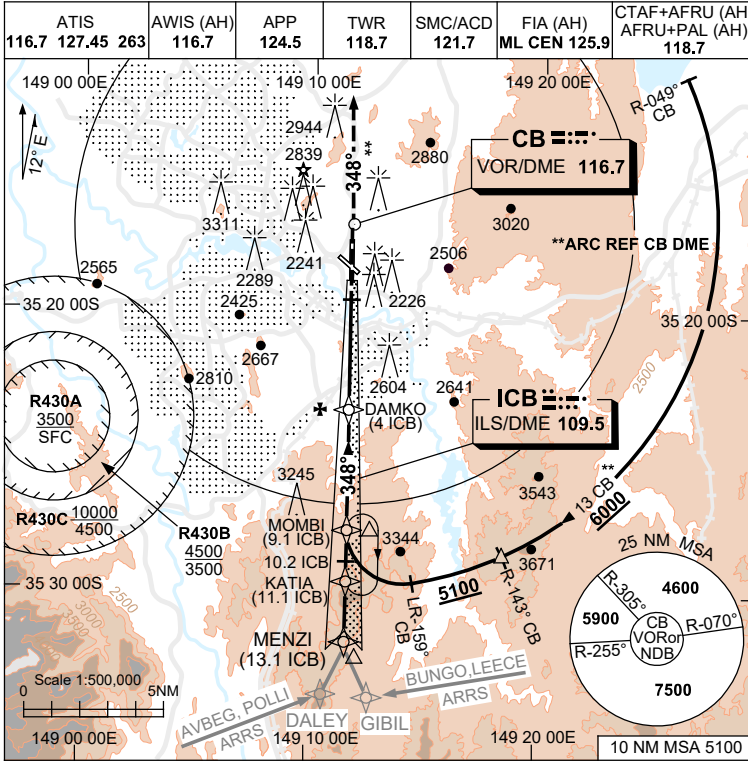

NAVAID RQ:
• DME or GNSS (ILS SA CAT I)
• DME (ILS CAT II & SA CAT II)




TR	IN	TURN	TIME	MIN ALT	DME LMT
348°	Right	1	1	5600	12
348°	Right	1	1	6000	



AD ELEV 1887
Bearings are Magnetic
Elevations in FEET AMSL

NM TO ICB DME	1	2	3	4	5	6	7	8	9.1	10	10.2	11	11.1
ALT (3° APCH PATH)	2200	2500	2820	3140	3460	3780	4100	4410	4760	5050	5110	5370	5400

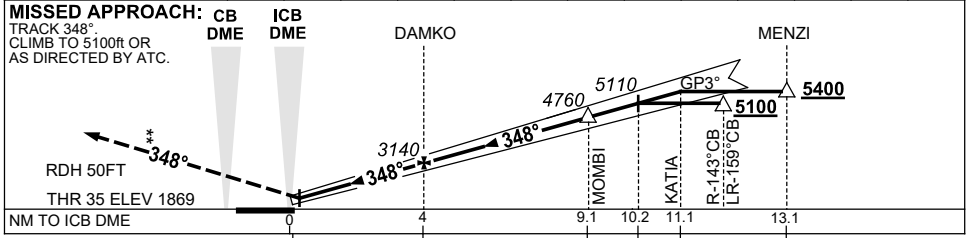

NM TO ICB DME	0	4	9.1	10.2	11.1	13.1
NM TO THR 35	0	3.8	8.9	10	10.9	12.9

- NOTES**
- #1. SPECIAL AIRCREW & ACFT CERTIFICATION REQUIRED.
 - #2. MAX IAS:
HLDG AT MOMB I 5600ft : 170KT.
6000ft : 210KT.
 - #3. MIN MISSED APCH GRAD TO 3200ft, THEN 2.5%.
 - #4. CAT A-C 350 RVR
CAT D 400RVR
 - 5. COLOUR: SEE SPEC NOTICES.

CATEGORY	A	B	C	D
S-I ILS CAT II# (4.6% MAP) ‡	RA 101 DA 1969 (100) 350 RVR			
S-I ILS SA CAT II# (4.6% MAP) ‡	RA 101 DA 1969 (100) 350/400 RVR §			
S-I ILS SA CAT I # (3.8% MAP) ‡	RA 152 DA 2019 (150) 450 RVR			

Changes: AD ELEV.

SCBII03-180