



13 JUN 2024

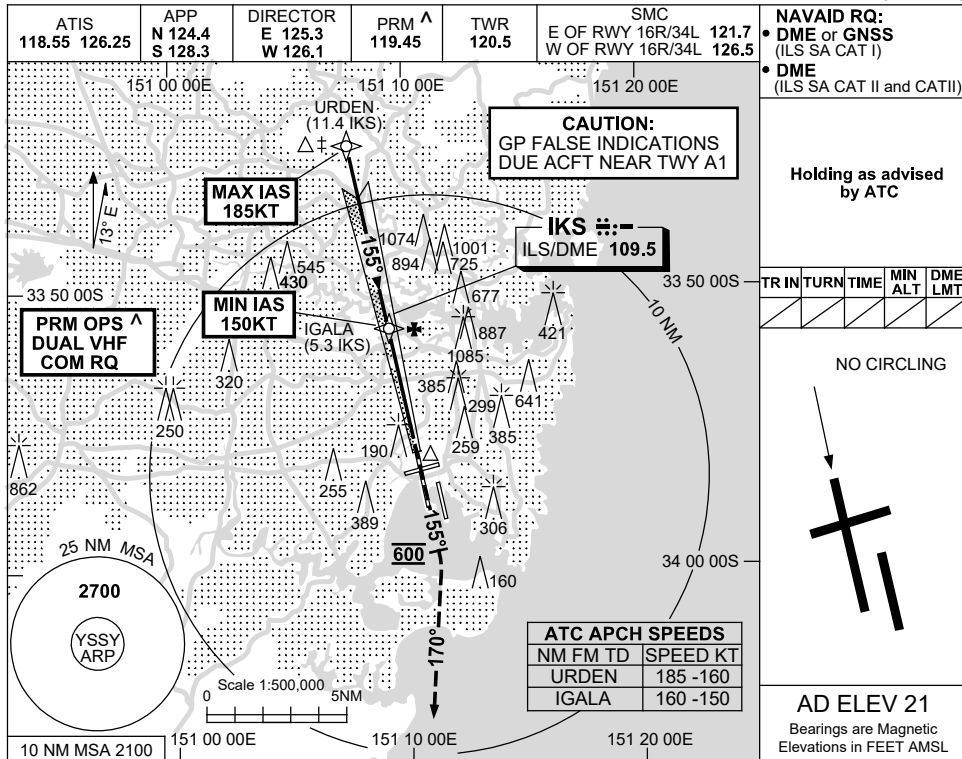


Holding as advised by ATC

TR IN	TURN	TIME	MIN ALT	DME LMT



AD ELEV 21
Bearings are Magnetic
Elevations in FEET AMSL

NM TO IKS DME	9.4	9	8	7	6	5.3	5	4	3	2	1			
ALT (3° APCH PATH)	3000	2870	2560	2240	1920	1700	1600	1280	960	640	330			

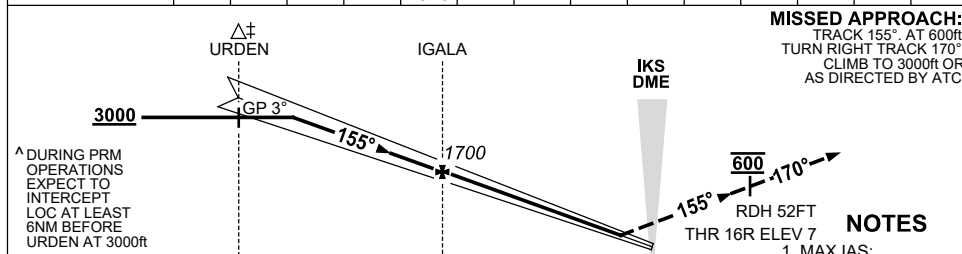

NM TO IKS DME	11.4	5.3	
NM TO THR 16R	11.2	5.2	0

- NOTES**
- MAX IAS: URDEN : 185KT.
 - ACFT MAY BE RADAR VECTORED TO FNA.
 - SIMULTANEOUS APCH AUTHORIZED WITH RWY 16L. SEE PRM USER INSTRUCTIONS FOR ADDN RQMNTS.
 - SPECIAL AIRCREW & ACFT CERTIFICATION REQUIRED.
 - CAT A, B, C 350 RVR CAT D 400 RVR.

CATEGORY	A	B	C	D
S-I ILS CAT II#		RA 101 DA 107 (100)	300 RVR	
S-I ILS SA CAT II#		RA 101 DA 107 (100)	350/400 RVR§	
S-I ILS SA CAT I#		RA 148 DA 157 (150)	450 RVR	

Changes: ABN DCMSD, Editorial. SSYII20-179

CAUTION: CLOSELY SPACED PARALLEL RUNWAYS[^]