

MELBOURNE**ELEV 434****AVFAX CODE 3001**

VIC

UTC +10

YMML

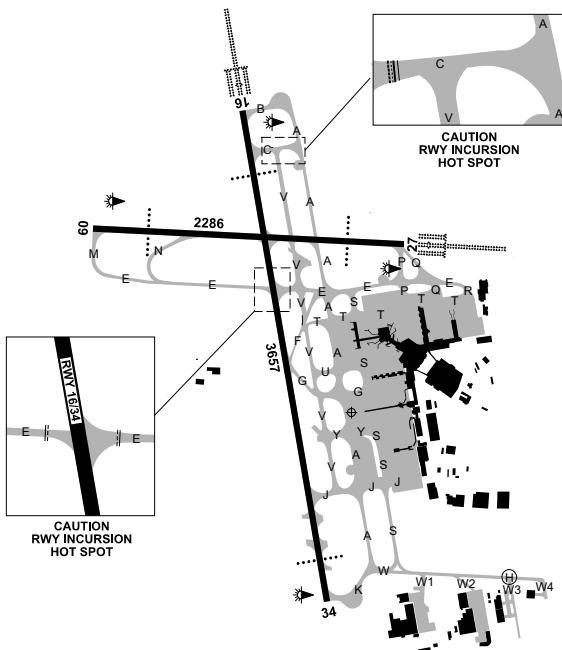
374024S

1445036E

VAR 12 DEG E

CERT

AD OPR Australia Pacific Airports (Melbourne) Pty Ltd, Locked Bag 16, Tullamarine, VIC, 3043. PH 03 9297 1600. Fax 03 9297 1886.

**REMARKS**

1. AD Charges: All ACFT.
2. This AD is a Security Controlled Airport.
3. Pavement concessions to be assessed by AD OPR for in excess of published PCN 102.
4. AD operates as public.

HANDLING SERVICES AND FACILITIES

BP: phone 0499 246 313.

Mobil: phone 03 8346 6901.

VIVA: 1900-1600 UTC DLY. Phone 03 9338 7156. JET A1 only.

Skytanking: 0500-0000 UTC DLY. Phone 0439 000 021. JET A1.

Melbourne Jet Base (MJB) - Full FBO services and VIP facilities for ACFT up to 400,000KG. H24 with 2HR PN for Civil and MIL ACFT up to 50,000KG. Short/long-term hangarage (subject to availability) and apron PRKG AVBL on private apron, direct ACFT and vehicle access. Over the counter Customs, Immigration and Quarantine available H24 with PN. Apron Hangar located off W2. Phone +61 3 8370 9640. Email: ops@melbournejetbase.com.au or shane.collings@melbournejetbase.com.au. VHF 129.75 CS 'Melbourne Jet Base'.

General

AD OPR does not provide ACFT marshalling services. All requests for ACFT marshalling should be directed to the airlines or FBO (if applicable).

RESCUE AND FIREFIGHTING SERVICES

1. CAT 9.
2. 131.0 MHz AVBL H24. Request via ATC.

APRONS AND TAXIWAYS

1. Terminal 1 apron area BTN pier B and C, not AVBL to ACFT ABV 47.6M wingspan.
2. Terminal 3 apron area BTN pier E and F, not AVBL to ACFT ABV 60.3M wingspan.
3. RUNWAY INCURSION HOTSPOT
RWY 16/34 and TWY E.

SURFACE MOVEMENT GUIDANCE

RWY touchdown zone and fixed distance markings on RWY 16/34 and RWY 09/27.

AERODROME OBSTACLES

1. RVR transmissometers (unlit) (frangible) within RWS all RWY, 14FT AGL.
2. RWY 27 HIAL 409FT AMSL BRG 013 DEG MAG 1,343M FM ARP. Infringes RWY 09 TKOF SFC by 2FT.
3. RWY 16 HIAL 440FT AMSL BRG 331 DEG MAG 2,540M FM ARP. Infringes RWY 24 TKOF SFC by 3FT.
4. IWI (unlit) 431FT AMSL BRG 301 DEG MAG 2,378M FM ARP. Infringes transitional SFC by 4FT.
5. GP Apparatus (lit):
 - a. Tower 450FT AMSL BRG 352 DEG MAG 1,409M FM ARP. Infringes transitional SFC by 42FT.
 - b. Aerial 421FT AMSL BRG 353 DEG MAG 1,410M FM ARP. Infringes transitional SFC by 14FT.
 - c. Tower 475FT AMSL BRG 324 DEG MAG 2,034M FM ARP. Infringes transitional SFC by 49FT.
 - d. Aerial 443FT AMSL BRG 324 DEG MAG 2,154M FM ARP. Infringes transitional SFC by 15FT.
6. DME antenna (lit) 434FT AMSL BRG 344 DEG MAG 1,476M FM ARP. Infringes transitional SFC by 2FT.
7. BLDG (lit) 424FT AMSL BRG 320 DEG MAG 1,697M FM ARP. Infringes transitional SFC by 9FT.
8. Control TWR (lit) 582FT AMSL BRG 280 DEG MAG 1,292M FM ARP. Infringes inner horizontal SFC by 70FT.
9. Antennas (lit):
 - a. 759FT AMSL BRG 038 DEG MAG 3,544M FM ARP. Infringes inner horizontal SFC by 242FT.
 - b. 562FT AMSL BRG 054 DEG MAG 3,482M FM ARP. Infringes inner horizontal SFC by 45FT.
10. Radio mast (lit) 1,000FT AMSL BRG 213 DEG MAG 7,406M FM ARP. Infringes outer horizontal SFC by 139FT.
11. Towers (lit):
 - a. 619FT AMSL BRG 312 DEG MAG 5,570M FM ARP. Infringes inner horizontal SFC by 103FT.
 - b. 643FT AMSL BRG 312 DEG MAG 5,723M FM ARP. Infringes conical SFC by 67FT.
12. Spire (lit) 524FT AMSL BRG 327 DEG MAG 3,636M FM ARP. Infringes transitional SFC by 7FT.
13. Stockpiles:
 - a. Unlit, 679FT AMSL BRG 308 DEG MAG 7,247M FM ARP. Infringes conical SFC by up to 26FT.
 - b. Lit, 829FT AMSL BRG 352 DEG MAG 6,807M FM ARP. Infringes conical SFC by up to 223FT.
14. Temporary obstacles (trees):
 - a. 442FT AMSL BRG 018 DEG MAG 1,628M FM ARP. Infringes transitional SFC by 7FT.
 - b. 439FT AMSL BRG 031 DEG MAG 1,505M FM ARP. Infringes RWY 09 TKOF SFC by 1FT.
 - c. 438FT AMSL BRG 022 DEG MAG 1,619M FM ARP. Infringes RWY 27 APCH SFC by 4FT.
 - d. 463FT AMSL BRG 291 DEG MAG 3,242M FM ARP. Infringes RWY 27 TKOF SFC by 4FT.

- e. 359FT AMSL BRG 176 DEG MAG 1,957M FM ARP. Infringes RWY 16 TKOF SFC by 1FT.
- f. 369FT AMSL BRG 176 DEG MAG 2,049M FM ARP. Infringes RWY 34 APCH SFC by 1FT.
- g. 374FT AMSL BRG 178 DEG MAG 2,033M FM ARP. Infringes RWY 34 APCH SFC by 8FT.
- h. 384FT AMSL BRG 185 DEG MAG 1,548M FM ARP. Infringes transitional SFC by 3FT.
- i. 553FT AMSL BRG 328 DEG MAG 3,683M FM ARP. Infringes transitional SFC by 27FT.
- j. 505FT AMSL BRG 329 DEG MAG 3,518M FM ARP. Infringes RWY 16 APCH SFC by 2FT.
- k. 500FT AMSL BRG 327 DEG MAG 3,163M FM ARP. Infringes transitional SFC by 8FT.
- l. 451FT AMSL BRG 306 DEG MAG 2,206M FM ARP. Infringes transitional SFC by 6FT.
- m. 538FT AMSL BRG 325 DEG MAG 3,092M FM ARP. Infringes inner horizontal SFC by 21FT.
- n. 534FT AMSL BRG 325 DEG MAG 3,005M FM ARP. Infringes inner horizontal SFC by 17FT.
- o. 542FT AMSL BRG 324 DEG MAG 3,012M FM ARP. Infringes inner horizontal SFC by 25FT.
- p. 535FT AMSL BRG 323 DEG MAG 2,899M FM ARP. Infringes inner horizontal SFC by 18FT.
- q. 513FT AMSL BRG 325 DEG MAG 3,007M FM ARP. Infringes inner horizontal SFC by 4FT.
- r. 521FT AMSL BRG 324 DEG MAG 2,772M FM ARP. Infringes inner horizontal SFC by 5FT.
- s. 515FT AMSL BRG 324 DEG MAG 2,859M FM ARP. Infringes inner horizontal SFC by 2FT.
- t. 538FT AMSL BRG 326 DEG MAG 3,320M FM ARP. Infringes inner horizontal SFC by 22FT.
- u. 549FT AMSL BRG 323 DEG MAG 3,106M FM ARP. Infringes inner horizontal SFC by 33FT.
- v. 549FT AMSL BRG 328 DEG MAG 3,697M FM ARP. Infringes inner horizontal SFC by 33FT.
- w. 535FT AMSL BRG 326 DEG MAG 3,580M FM ARP. Infringes inner horizontal SFC by 19FT.
- x. 563FT AMSL BRG 325 DEG MAG 3,344M FM ARP. Infringes inner horizontal SFC by 47FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT A, METAR/SPECI, TAF3 H24, AD WRNG, WS WRNG.
2. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MWO 03 9669 4850.
3. AWIS PH 03 8470 3214 - Report faults to BoM.

PHYSICAL CHARACTERISTICS

- | | | | | | |
|-------|-----|------|--|--------|---------|
| 09/27 | 083 | 75a | PCN 102 /F /C /1750 (254PSI) /T Grooved. | WID 45 | RWS 300 |
| 16/34 | 160 | 120a | PCN 102 /F /C /1750 (254PSI) /T Grooved. | WID 60 | RWS 300 |
1. Concrete ends RWY 16, 27 and 34.
 2. OFZ exists on all RWY.

AERODROME AND APPROACH LIGHTING

RWY 09/27	MIRL		SDBY PWR AVBL
RWY 09/27	PAPI(5)	3.0 DEG74FT	SDBY PWR AVBL
RWY 27	HIAL-CAT II(4)		SDBY PWR AVBL
RWY 27	HIAL-CAT III(4)		SDBY PWR AVBL
RWY 27	HIRL		SDBY PWR AVBL
RWY 27	RCLL		SDBY PWR AVBL
RWY 27	RTZL		SDBY PWR AVBL
RWY 16/34	HIRL		SDBY PWR AVBL
RWY 16/34	PAPI(5)	3.0 DEG74FT	SDBY PWR AVBL
RWY 16/34	RCGL		SDBY PWR AVBL

RWY 16/34	RCLL	SDBY PWR AVBL
RWY 16	HIAL-CAT II(3)	SDBY PWR AVBL
RWY 16	HIAL-CAT III(3)	SDBY PWR AVBL
RWY 16	RTZL	SDBY PWR AVBL
RWY 34	HSL(1)	SDBY PWR AVBL
RWY 34	RTIL(2)	SDBY PWR AVBL

- (1) Landing RWY 34 the Hold Short Line is marked with red and white runway Intersection Signs and is indicated by six occulting white flush fitted lights across RWY 34.
- (2) RTIL installed to aid RWY ident.
- (3) Associated SFL 600M. Not AVBL when cloud base is greater than 1000FT AGL and VIS greater than 5000M.
- (4) Associated SFL 420M. Not AVBL when cloud base is greater than 1000FT AGL and VIS greater than 5000M.
- (5) Both sides coincide with RWY Aim Point Markings.
1. **ALS type and length**
 - a. RWY 16 - barrette CL: 900M.
 - b. RWY 27 - barrette CL: 720M.
2. RCLL: full length of RWY, white in colour at 15M spacing to a point of 900M FM RWY end, thence alternating red/white to a point of 300M FM RWY end, thence red in colour.
3. HIRL: RWY edge light spacing full length of RWY, white in colour at 60M spacing to a point of 600M FM RWY end, thence yellow in colour.
4. RCGL: RWY edge light spacing full length of RWY, white in colour at 60M spacing.
5. MIRL: RWY edge light spacing full length of RWY, white in colour at 60M spacing.
6. RWY threshold lighting is green in colour and is supplemented by wingbars on RWY 16/34 only.
7. RWY end lighting is red in colour and not supplemented by wingbars.
8. RTZL extends 900M FM threshold.
9. RWY 09/27 MIRL may be partially obscured when downwind RWY 09.
10. Stopbars and Runway Guard Lights (RGL) at all RWY/TWY intersections.

OTHER LIGHTING

- ABN ALTN 10 WG H24. Located top of ATC TWR.
1. Secondary PWR switchover time: 1 SEC during LVP; 15 SEC OT.
 2. **TWY LIGHTING**
 - 2.1. G centre line lights on all TWY.
 - 2.2. Where RQ yellow intermediate holding point lighting.

ATS AND AERODROME COMMUNICATION FACILITIES

ACD	MELBOURNE DELIVERY	127.2
APP	MELBOURNE APPROACH	132.0
ATIS	MELBOURNE ATIS	114.1 118.0
DEP	MELBOURNE DEPARTURES	118.9 (2) 129.4 (3)
SMC	MELBOURNE GROUND	121.7
TWR	MELBOURNE TOWER	120.5
VOLMET	AUSTRALIA	6676 (1) 11387 (1)

- (1) H24, BCST 00 - 05 & 30 - 35. Refer AIP GEN 3.5.
- (2) Routes 264 radial through N to 092 radial.
- (3) Routes 263 radial through S to 093 radial.

RADIO NAVIGATION AND LANDING AIDS

GBAS	G09A	CH 21118 (RWY09)	374005.7S	1444959.1E	(6)
GBAS	G16A	CH 21940 (RWY16)	374005.7S	1444959.1E	(6)
GBAS	G27A	CH 21529 (RWY27)	374005.7S	1444959.1E	(6)
GBAS	G34A	CH 20707 (RWY34)	374005.7S	1444959.1E	(6)

DME	IMS	109.7/ 34X (RWY16)	373924.1S	1445001.2E	(3)
GP	IMS	333.2 (RWY16)	373924.1S	1445001.5E	
ILS	IMS	109.7 (RWY16)	374119.1S	1445029.5E	(4)
LOC	IMS	109.7 (RWY16)	374119.1S	1445029.5E	
DME	IMW	109.3/ 30X (RWY27)	373938.2S	1445040.4E	(5)
GP	IMW	332 (RWY27)	373938.5S	1445040.3E	
ILS	IMW	109.3 (RWY27)	373936.2S	1444836.4E	
LOC	IMW	109.3 (RWY27)	373936.2S	1444836.3E	
DME	ML	114.1/ 88X	373936.3S	1445031.8E	(2)
VOR	ML	114.1	373936.5S	1445031.2E	(1)

(1) Scalloping may occur beyond 50NM in sectors 270 to 290 DEG

(2) Antenna ELEV 399FT.

(3) Antenna ELEV 435FT.

(4) ILS RWY 16 Performance Classification III/E/4.

(5) Antenna ELEV 418FT.

(6) Between 50NM and 23NM from the GBAS site, GLS course deviation information is advisory only. Within 23NM from the GBAS site, GLS course deviation information is approved for the conduct of an Instrument Approach.

Other DME, ILS, MKR and no idents or ident XP, intermittently on test.

LOCAL TRAFFIC REGULATIONS

1. All aircraft must provide their parked position/gate number to ATC on acknowledgement of airways clearance.
2. All tugs and vehicles repositioning ACFT and/or equipment via the TWY must make initial CTC with Melbourne Delivery on 127.2 and state their originating bay/apron, destination bay/apron and aircraft type (if applicable). Melbourne Delivery will advise the tug or vehicle to monitor Ground on 121.7. Do not contact Ground, monitor only.
3. HEL must ARR and DEP from the RWY or TWY W HELIPAD. Exemptions may be provided by the Senior Airside Safety Officer, Car 2 0418 335 985.
4. Engine ground runs permitted - restrictions may apply. CTC Senior Airside Safety Officer, Car 2 0418 335 985.
5. For A380 ACFT DEP RWY 09/27 only, 10MIN PN must be given to ATC for all approvals.
6. Refer to *AIP DAP* for A380 and B748 for Aerodrome Ground Movement Charts.

7. RESTRICTIONS DUE JET BLAST

- a. ACFT operating on INTL, Domestic and Freight aprons are subject to the FLW limitations:
 - (i) Engine starts using more than idle power are prohibited, unless authorised by ATC at an approved location.
 - (ii) ACFT taxi to the terminal between INTL and DOM terminal piers and also only Bay H3 must use no more than idle power.
 - (iii) If ACFT with wingspan ABV 36M is stopped prior to docking on bays D3, D4, D5, D6, D8, D12, D13, D15 and on H1, H2 and H3 docking must be completed under tow.
 - (iv) ACFT with wingspan ABV 36M taxi to the terminal between INTL and DOM terminal piers and also only Bay H3 must not conduct single engine taxi due to clause (ii) and (iii).
 - (v) ACFT operating from all Terminal bays, are restricted to starting two engines not above idle prior to pushback. No other engine is to be started until ACFT is clear of aprons.
 - (vi) ACFT wingspan ABV 36M is stopped prior to docking on bays D7, D9, D10 and D11. ACFT may continue taxi onto bay at idle power only with the approval of the Senior Airside Safety Officer (Car 2).
 - (vii) To prevent jet blast issues on opposite ACFT parking bays, ACFT must hold on the TWY/TXL when Visual Docking Guidance System (VDGS) or marshaller is not AVBL. Once VDGS or marshaller is AVBL, ACFT may proceed onto bay.
- b. Pilots of A380 and B747 ACFT are to exercise caution when applying PWR on outboard ENG, whilst taxiing, to prevent erosion of TWY shoulders.

- c. All A380 ACFT taxiing to bays D13 and D15 must stop and shut down engines prior to turning onto the bay. ACFT must continue taxi under tow.
- d. Right turns from TWY T northbound onto TWY P, pilots are to exercise caution when applying power.

8. TURNING

- a. Left turns from TWY G Rapid Exit Taxiway (RET) into TWY V not AVBL to ACFT ABV 36M wingspan.
- b. Right turns from TWY V into TWY G (RET) not AVBL to ACFT ABV 36M wingspan.
- c. Right turns from TWY F (RET) into TWY V not AVBL to ACFT ABV 36M wingspan.
- d. Left turns from TWY V into TWY F (RET) not AVBL to ACFT ABV 36M wingspan.
- e. Right turns FM TWY E (via TWY R) into TWY T not AVBL to ACFT ABV 36M wingspan.
- f. Left turns FM TWY S into TWY W not AVBL to ACFT ABV 36M wingspan, unless under tow.
- g. Right turns FM TWY W into TWY S not AVBL to ACFT ABV 36M wingspan, unless under tow.
- h. Pilots of B777-300, A340-600, A340-500, A350-900, A350-1000 and type ACFT should exercise caution during turns as normal clearances to TWY edge may not be AVBL. Contact AD OPR for details of preferred taxi routes.
- i. Left turns FM TWY T into TWY S not AVBL to A380 ACFT right turns FM TWY S into TWY T not AVBL to A380 ACFT.

9. TAXIWAY RESTRICTIONS

- a. Any deviations from taxiway/taxilane centre lines is prohibited unless advised to ATC and the Senior Airside Safety Officer (Car 2) and approved by a company engineer in attendance during the manoeuvre.
- b. TWY S BTN TWY T and TWY U not AVBL to through TFC.
- c. TWY S BTN TWY U and TWY G not AVBL to through TFC ABV 36M wingspan. OPS under tow are permitted for ACFT wingspan ABV 36M and BLW 65M via TWY S between TWY G and TWY U.
- d. Pilots of A340-600 and B747-8 ACFT taxiing for Southern APN Bays H1, H2 and H3 must enter and exit the Southern APN via TWY J, or alternatively via TWY Y and TWY S.
- e. TWY T BTN TWY R and TWY Q restricted to MAX wingspan of 60.3M and MAX taxi speed of 5KT for ACFT greater than 36M.
- f. Taxilane Q not AVBL for ACFT ABV 36M wingspan.
- g. Restrictions of simultaneous use of TWY V extension and TWY F BTN TWY V and TWY A are as follows:
 - (i) Any ACFT taxiing southbound on TWY V and holding short of TWY F, restricts movements on TWY F between TWY V and TWY A to MAX Code C ACFT (A320/B737).
 - (ii) A Code C ACFT (A320/B737) taxiing northbound on TWY V and holding short of TWY E, restricts movements on TWY F BTN TWY V and TWY A to MAX Code E ACFT (A350/B777).
 - (iii) A Code E ACFT (A350/B777) taxiing northbound on TWY V and holding short of TWY E, restricts movements on TWY F BTN TWY V and TWY A to MAX Code C (A320/B737).

Note: in points i-iii above there are no wingspan restrictions on an ACFT which vacate RWY 34 onto rapid exit TWY F and subsequently taxi onto TWY T.

- h. TWY F not AVBL for ACFT ABV 5,700KG LDG RWY 16.
- i. TWY G not AVBL for ACFT ABV 5,700KG LDG RWY 34.
- j. Taxilane Golf has a single centre line to accommodate a MAX wingspan of 60.3M.
 - (i) ACFT arrival and departures for Northern Pier (Pier E) and Southern Pier (Pier F) will be via the Taxilane Golf single centre line.
- k. ACFT restrictions for TWY W are as follows:
 - (i) W1 tow only unless exemption provided. CTC Senior Airside Safety Officer, Car 2 0418 335 985.
 - (ii) W2 tow only to ACFT ABV 36M wingspan.
 - (iii) TWY W east of W2 tow only to ACFT ABV 36M wingspan.
 - (iv) W3 tow only unless exemption provided. CTC Senior Airside Safety Officer, Car 2 0418 335 985.

10. **PARKING**
 - a. Parking of itinerant ACFT must be approved by the Integrated Operations Centre, 03 9297 1624, Fax 03 9297 1652. Email: sacc@melair.com.au at least 24HR prior to ETA.
 - b. International Concourse Delta, when Visual Docking Guidance System (VDGS) or Advanced Visual Docking Guidance System (A-VDGS) is switched off, the screen reads "STOP STOP". This will remain illuminated until the VDGS is switched on.
 - c. ACFT must not continue docking if VDGS or A-VDGS is not activated or calibrated for their ACFT type unless a marshaller is present. If docking cannot proceed, hold PSN advise SMC.
11. **TRAINING, SURVEY AND AIRWORK FLIGHTS**
 - a. All ACFT planning practice instrument APCH (AVBL HR 2000-1300 UTC), survey or airwork WI the ML Terminal Airspace require prior ATC approval.
 - b. For training and airwork, pilots must contact the ML Traffic Manager on 03 9235 7337 to book a time slot. For ARR ACFT a request must be made to ML Centre by 120NM from Melbourne or on first contact for ACFT entering CTA within 120NM.
 - c. Training circuits are not permitted.
 - d. For survey flights, pilots must contact the ML Traffic Manager on 03 9235 7337 to discuss the planned operation prior to becoming airborne. Operations WI the lateral confines of the ML CTR should be conducted ABV A060. Lower altitudes may not be AVBL or will incur extensive delays. Preferred operating times for extended surveys are SAT afternoon and SUN morning.

FLIGHT PROCEDURES

1. ESTIMATED AIRBORNE TRAFFIC DELAYS

1.1. For ARR ACFT

- a. May be expected due to terminal area traffic density and/or single RWY operations:
 - (i) MON-FRI 2100-0000 UTC and 0600-1100 UTC: 20MIN
 - (ii) SAT 2100-0000 UTC: 20MIN
 - (iii) SUN 0600-1100 UTC: 20MIN
 - (iv) DLY 0000-0600 UTC: 10 MIN

Note: All times 1HR earlier during HDS. Actual holding times may differ from holding estimates. Historical data on actual holding is available from the NOMC.

2. ATC TRAFFIC MANAGEMENT SPEED

When **not** on a SID or STAR (including vectoring) - ACFT ARR or DEP ML must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

3. ARRIVAL PROCEDURES

By day, ATC may use 2,400M RWY separation between ACFT ARR to RWY 16/34. Both ACFT may occupy the RWY during application of the standard.

4. DEPARTURE PROCEDURES

Start clearance is required by ACFT DEP Melbourne for:

- a. Essendon or Moorabbin; or
- b. Practice instrument approach prior to DEP; or
- c. AWK in terminal area.

5. HELICOPTER ACCESS CORRIDOR

'The Sunbury Corridor' established within 1NM either side of a line between SWT and Melbourne RWY 16/34 - 09/27 intersection. Vertical limit SFC - 2,000FT AMSL. The corridor includes a VFR tracking point, Powerline Crossing (PWLC). Refer to Melbourne VTC. Corridor available HJ subject to weather, Melbourne TWR workload and traffic disposition. To request the Sunbury Corridor contact:

- a. Northbound - Essendon ground or TWR.
- b. Southbound - Melbourne TWR approaching SWT.

When operating in the corridor turn on landing lights. If required to hold at PWLC helicopters should hover. Do not orbit unless instructed by ATC.

6. LOW VISIBILITY OPERATIONS

- 6.1. For CASA APV operators, RWY 16 and RWY 27 are capable of supporting low VIS take-offs without limit, however only:
- RWY 16 and 27 are normally used for low VIS departures; and
 - RWY 16 is capable of supporting localiser guided takeoffs.
- Note: Flight crew must inform ATC at start up about an intention to conduct a takeoff that requires localiser guidance.*
- 6.2. Access to RWY 27 is via TWY P or TWY Q. Access to RWY 16 is via TWY B. Intersection departures are not permitted.
- 6.3. RWY 16 is the arrival RWY for low VIS operations and is capable of supporting Category II and III approaches.
- 6.4. Approved TWY exits are TWY G, TWY J and TWY K
- 6.5. The following TWY are NOT suitable for use in RVR conditions of less than a value of 350M:
- TWY T between TWY P and TWY R.
 - TWY S between TWY Y and TWY J.
 - TWY W east of TWY S.
- 6.6. All TWY are suitable for use in conditions of greater than RVR 350M.
- 6.7. Refer to *AIP DAP* for Aerodrome Ground Movement Charts.

7. LOW VISIBILITY PROCEDURES

- 7.1. Preparations for the initiation of Low Visibility Procedures (LVP) are commenced when VIS has reduced to 1,000M and/or the cloud ceiling is at or below 500FT and is further reducing or VIS on any part of the AD is insufficient to exercise control on the basis of visual surveillance. LVP initiation may occur earlier if conditions deteriorate rapidly.
- 7.2. When RVR is at or below 550M (less than 800M if RVR not AVBL) or when the cloud ceiling is at or below the CAT I minima, the ILS critical and sensitive areas are protected and 'LOW VISIBILITY PROCEDURES IN FORCE' is declared.
- 7.3. LVP are progressively lifted when the cloud ceiling is above the CAT I minima and the visibility reaches 850M and is increasing.
- 7.4. In the event of failure of RVR equipment, RWY visibility assessments will be provided.
- 7.5. ATC uses Advanced Surface Movement Guidance Control System (A-SMGCS) to monitor ACFT and vehicles on the Manoeuvring Area.
- 7.6. If A-SMGCS is unserviceable during LVP:
- ATC will further restrict operations on the Manoeuvring Area.
 - Position reporting procedures may be implemented.

8. FOLLOW ME SERVICE

- 8.1. Flight Crew must notify ATC if a 'Follow Me' service is required.

9. LAND AND HOLD SHORT OPERATIONS (LAHSO)

- 9.1. LAHSO is used at Melbourne. See the YMML RDS for 'LDA for LAHSO' information.
- 9.2. In the event of a go-around, ATC may assign an avoiding action turn to either ACFT.
- 9.3. A turn commenced at the minimum turn HGT for the ACFT, together with a climb at normal go-around climb rates, will provide adequate OBST clearance.

10. RWY 09 ARRIVALS AND RWY 16 DEPARTURES SIMULTANEOUS OPERATIONS

- 10.1. Simultaneous operations will be conducted with ACFT landing on RWY 09 and departing on RWY 16 from TWY E (370M FM RWY INT).

11. GROUND DELAY PROGRAM (GDP)

- 11.1. Inbound
- Melbourne GDP are applicable to all fixed wing, non priority flights departing from all Australian domestic airports, and arriving at Melbourne BTN 2000-1400 UTC DLY (1HR earlier during HDS).
 - Except as specified in the Note below, flights from all Australian airports are required to operate in accordance with COBT. The COBT can be obtained through their company or the NOMC Phone: 1800 020 626^.

Note: COBT generated by Perth Departure Management Program will take precedence over COBT generated by the Melbourne Arrivals GDP.

- Flights departing within a 60NM radius of Melbourne must also obtain a start clearance from the departure airport when active or from Melbourne ATC Phone: 03 9235 7337^

11.2. Outbound.

ACFT departing Melbourne AD for an Australian Airport with a GDP must contact ACD 127.2 after receiving an Airways Clearance and prior to start. ACD will check compliance with COBT before transferring to SMC 121.7.

12. CLEARANCE AND PUSHBACK PROCEDURES

When nominated on the ATIS all departures requiring a pushback must call ACD on 127.2 with their request. ACD will instruct flightcrew to "MONITOR GROUND" or "MONITOR GROUND ON 121.7". When clearance is AVBL "Melbourne Ground" (SMC) will issue the pushback clearance or other instruction.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

1. Wildlife hazard exists.
 - a. The following species are present all year round:
 - (i) Australian magpies - may transit across RWS.
 - (ii) Rainbow lorikeet – may transit E end of the aerodrome.
 - (iii) Wedge-tailed eagles during HJ in thermal above N and W ends of the aerodrome.
 - (iv) Ibis and ducks following MOD RA, TS and adverse WX.
 - (v) Little raven – flocks may forage inside RWS.
 - (vi) Feral pigeon - may transit across south end of aerodrome.
 - b. A seasonal increase in the numbers of the following species can be EXP:
 - (i) Common starling – increase EXP within 2 hours of first and last light, BTN JAN and JUL. Transit across east end of RWY 27.
 - (ii) Galah and corella BTN SEP to NOV – may transit across RWS.
 - (iii) Grey-headed flying-fox during HN. Increase EXP BTN JAN and APR.
2. Security screening is required for all passengers from all passenger ACFT, irrespective of size, departing from any of the Domestic, International or Freight Apron areas at Melbourne Airport. A charge is applicable for this service and a schedule of charges can be obtained from the Aerodrome Operator on 03 9297 1024. Any queries should also be directed to the Aerodrome Operator on the same number.
3. ACFT carrying Dangerous Goods Class 1 explosives require approval from AD OPR at least 48HR prior to ETA.
4. Model ACFT OPR WI 500M RAD of PSN 374042.1S 1444723.1E BRG 251 MAG 2.4NM FM ARP. SFC to 300FT AGL.
5. Blasting may occur BRG 353 DEG MAG 3.6NM FM ARP. SFC to 500FT AGL. Blasting times are coordinated with ATC.
6. Weather balloon launch APRX 2315 and 1115 UTC FM 400M WSW ARP. Launches may occur at other times.

CHARTS RELATED TO THE AERODROME

1. WAC 3469, 3470.
2. Aerodrome Obstruction Chart Type A: June 2024.
3. Aerodrome Obstruction Chart Type B: July 2009.
4. Precision Approach Terrain Charts AVBL from AD OPR.
5. Also refer to AIP Departure and Approach Procedures.