


USE QNH

ILS-X or LOC-X RWY 29

DARWIN, NT (YPDN)

20 MAR 2025

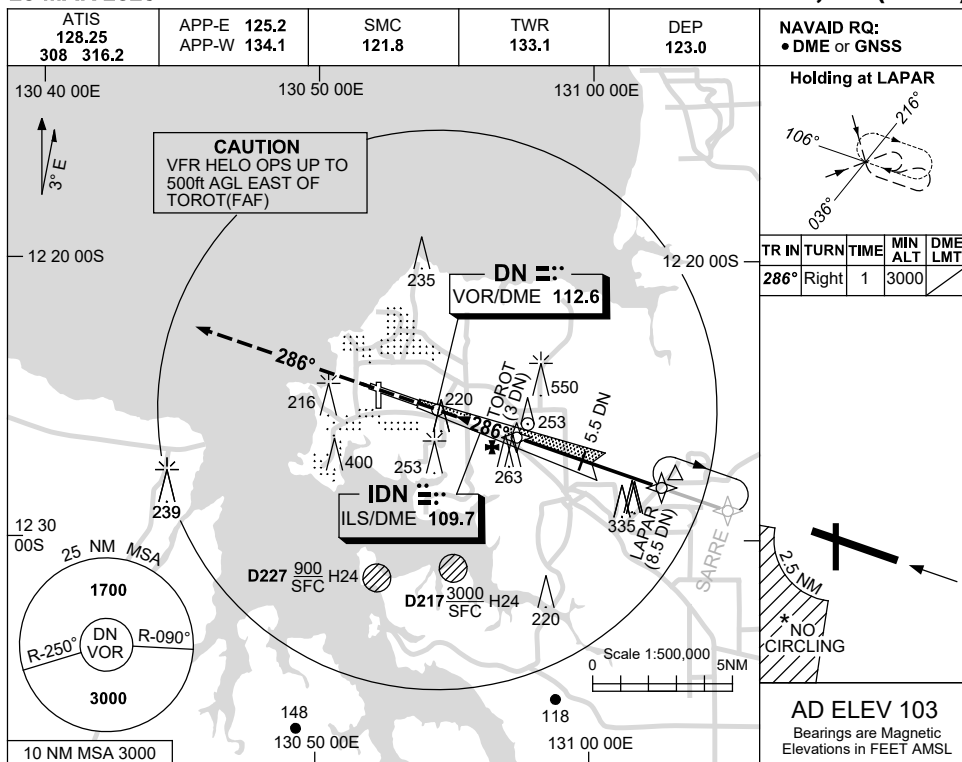


NM TO DN DME	0.5	1	2	3	4	5	5.5	6	7	8	8.2		
ALT (3° APCH PATH)	520	690	1010	1330	1650	1970	2120	2280	2600	2920	3000		

MISSED APPROACH:

TRACK 286°
CLIMB TO 3000ft OR
AS DIRECTED BY ATC.

GNSS permitted in lieu of DME
Reference waypoint DN VOR

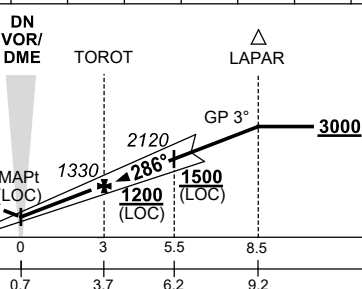

NM TO DN DME

NM TO THR 29

NOTES

1. ACFT MAY BE RADAR VECTORED TO FNA.
- * 2. SPECIAL ALTN MNM 800/4 KM.
3. DME 71X(112.4) NOT TO BE USED WITH THIS PROCEDURE.
- * 4. NO CIRCLING IN SECTOR SW OF RWY 11/29 AND RWY 18/36 BEYOND 2.5NM.

CATEGORY	A	B	C	D/DL
S-I ILS		290 (209) 0.8		
S-I LOC		520 (439-1.6)		
CIRCLING *	700 (597-2.4)		800 (697-4.0)	1000 (897-5.0)
ALTERNATE *	(1097-4.4)		(1197-6.0)	(1397-7.0)

Changes: CAT DL.

PDNI02-182